

RBL01

LUMIDENSE

Professional Lighting Solutions Partner

RECESSED LED BACK LIGHT

TECHNICAL SPECIFICATION

Housing: Aluminum Housing.

Protection: IP20.

Light Shade: Opal PS diffuser.

Rendering Index: CRI > 80




Available CCT: 3000K, 4000, 6500K.

Light Source: SMD2835

Lifetime: 30,000 Hrs 25C. 3Y warranty CB Comply.



PHOTOMETRIC DATA

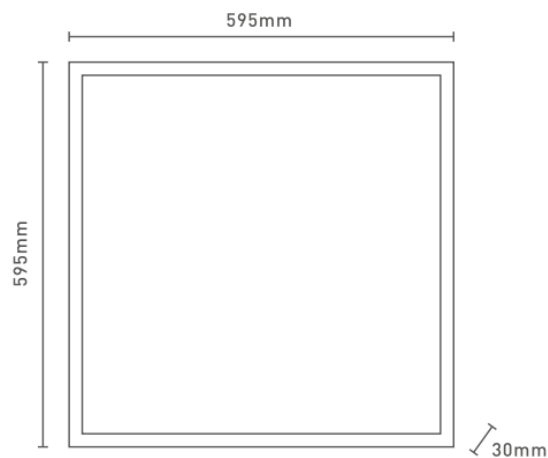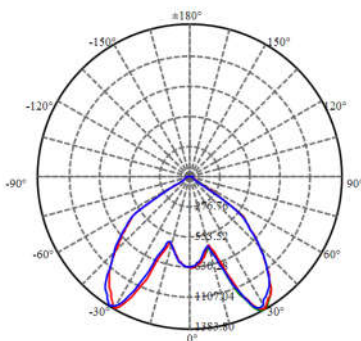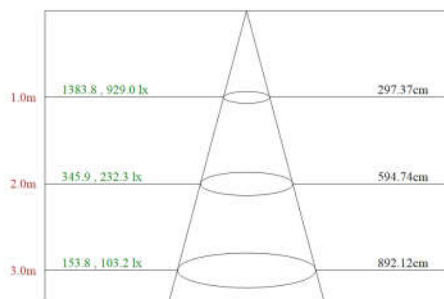

ORDERING INFORMATION

FAMILY SIZE	MAX WATTAGE	OUTPUT LUMEN	OUTER SIZE(A,B)	HEIGHT (H)
RBL01-36	36W	3600LM	595X595MM	30MM
RBL01-40	40W	4000LM	595X595MM	30MM
RBL01-48	48W	4800LM	595X595MM	30MM

ZHONGSHAN LUMIDENSE TRADING CO LTD.

Room 2008, Yihualingfeng Building,
No.38 Yuelai south Road, Shiqi district,
Zhongshan city, china.
P.O.:528400

Phone: +86 760-88238830
Mobile: +86 131 2934 5064
Website: www.lumidense.com
Email: lumidense@lumidense.com

RDC02

LUMIDENSE

Professional Lighting Solutions Partner

RECESSED LED COB DOWNLIGHT

TECHNICAL SPECIFICATION

Housing: Die cast aluminum for body and the ring.

Protection: IP20.

Light Shade: Tempered Glass with frosted circle.

Rendering Index: CRI > 80



Available CCT: 3000K, 4000, 6500K.

Light Source: CREE, BRIDGELUX.

Lifetime: 30,000 Hrs 25C. 3Y warranty CB Comply.




PHOTOMETRIC DATA

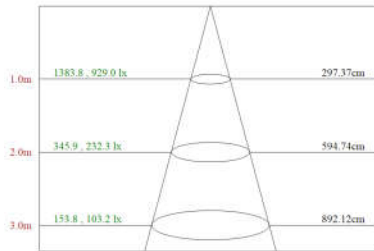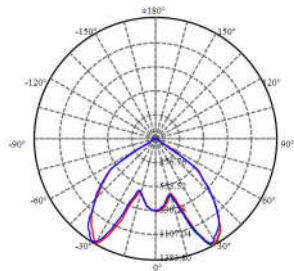

ORDERING INFORMATION

FAMILY SIZE	MAX WATTAGE	OUTPUT LUMEN	OUTER SIZE	CUT OUT
RDC02—2.5	7W	560LM	95MM	75MM
RDC02—3	9W	720LM	115MM	95MM
RDC02—4	12W	960LM	135MM	110MM
RDC02—5	15W	1200LM	165MM	140MM
RDC02—6	20W	1600LM	195MM	160MM
RDC02—8	30W	2400LM	225MM	190MM

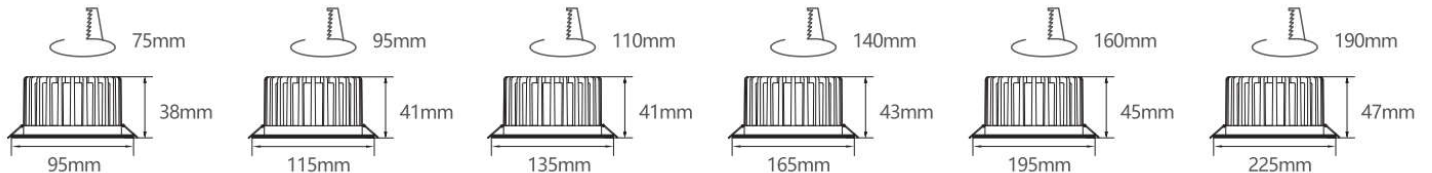

ZHONGSHAN LUMIDENSE TRADING CO LTD.

Room 2008, Yihualingfeng Building,
No.38 Yuelai south Road, Shiqi district,
Zhongshan city, china.
P.O.:528400

Phone: +86 760-88238830
Mobile: +86 131 2934 5064
Website: www.lumidense.com
Email: lumidense@lumidense.com

RDC03

RECESSED LED COB DOWNLIGHT

TECHNICAL SPECIFICATION

Housing: Die cast aluminum for body and the ring.

Protection: IP20.

Light Shade: Tempered Glass with frosted circle.

Rendering Index: CRI > 80

Available CCT: 3000K, 4000, 6500K.

Light Source: CREE, BRIDGELUX.


Lifetime: 30,000 Hrs 25C. 3Y warranty, CB Comply.

LUMIDENSE

Professional Lighting Solutions Partner




PHOTOMETRIC DATA

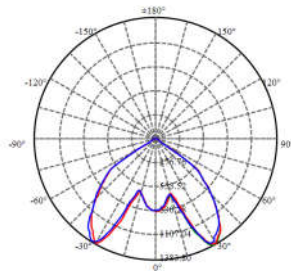

ORDERING INFORMATION

FAMILY SIZE	MAX WATTAGE	OUTPUT LUMEN	OUTER SIZE	CUT OUT
RDC03—2.5	7W	560LM	90MM	75MM
RDC03—3	9W	720LM	115MM	95MM
RDC03—4	12W	960LM	135MM	115MM
RDC03—5	18W	1440LM	165MM	145MM
RDC03—6	24W	1920LM	190MM	165MM
RDC03—8	35W	2800LM	220MM	195MM

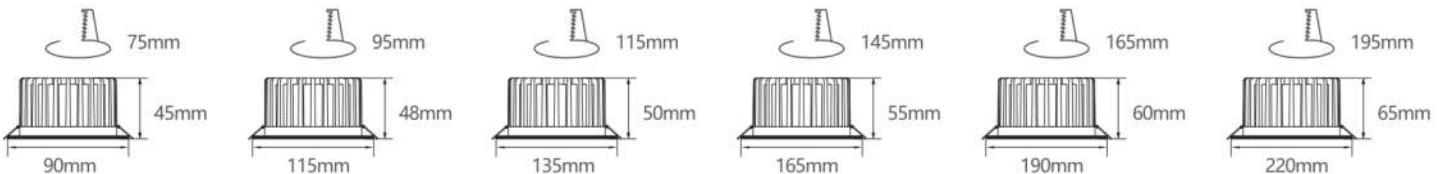

ZHONGSHAN LUMIDENSE TRADING CO LTD.

Room 2008, Yihualingfeng Building,
No.38 Yuelai south Road, Shiqi district,
Zhongshan city, china.
P.O.:528400

Phone: +86 760-88238830
Mobile: +86 131 2934 5064
Website: www.lumidense.com
Email: lumidense@lumidense.com

RDC01

RECESSED LED COB DOWNLIGHT

TECHNICAL SPECIFICATION

Housing: Die cast aluminum for body and the ring.

Protection: IP20.

Light Shade: Tempered Glass with frosted circle.

Rendering Index: CRI > 80

Available CCT: 3000K, 4000, 6500K.

Light Source: CREE, BRIDGELUX.


Lifetime: 30,000 Hrs 25C. 3Y warranty CB Comply.

LUMIDENSE

Professional Lighting Solutions Partner




PHOTOMETRIC DATA

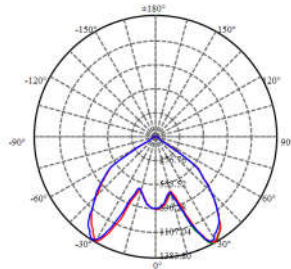

ORDERING INFORMATION

FAMILY SIZE	MAX WATTAGE	OUTPUT LUMEN	OUTER SIZE	CUT OUT
RDC01—2.5	7W	560LM	95MM	75MM
RDC01—3	9W	720LM	115MM	95MM
RDC01—4	12W	960LM	135MM	110MM
RDC01—5	15W	1200LM	165MM	140MM
RDC01—6	20W	1600LM	195MM	160MM
RDC01—8	30W	2400LM	225MM	200MM

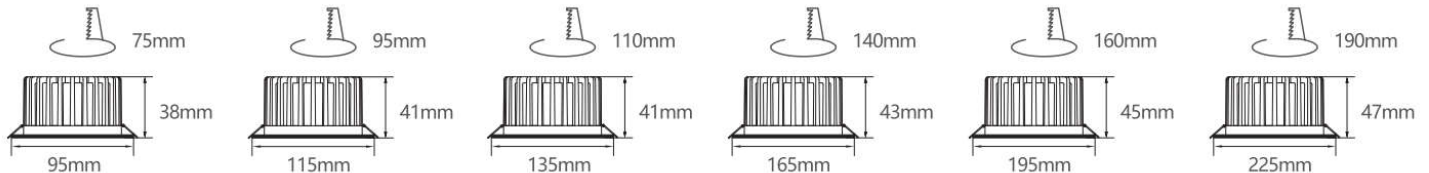

ZHONGSHAN LUMIDENSE TRADING CO LTD.

Room 2008, Yihualingfeng Building,
No.38 Yuelai south Road, Shiqi district,
Zhongshan city, china.
P.O.:528400

Phone: +86 760-88238830
Mobile: +86 131 2934 5064
Website: www.lumidense.com
Email: lumidense@lumidense.com

RASP01

LUMIDENSE

Professional Lighting Solutions Partner

ADJUSTABLE RECESSED LED SPOTLIGHT

TECHNICAL SPECIFICATION

Housing: Die cast aluminum for body and the ring.

Protection: IP20.

Light Shade: Tempered Glass with frosted circle.

Rendering Index: CRI > 80



Available CCT: 3000K, 4000, 6500K.

Light Source: CREE, BRIDGELUX COB.

Lifetime: 30,000 Hrs 25C. 3Y warranty CB Comply.




PHOTOMETRIC DATA

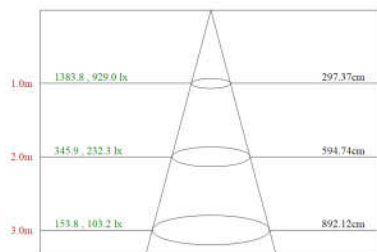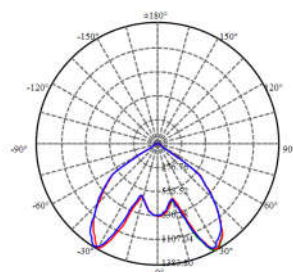

ORDERING INFORMATION

FAMILY SIZE	MAX WATTAGE	OUTPUT LUMEN	OUTER SIZE (D, H)	CUT OUT(C)
RASP01-7	7W	560LM	95MM, 50MM	75MM
RASP01-12	12W	960LM	95MM, 58MM	75MM
RASP01-18	18W	1440LM	115MM, 65MM	95MM
RASP01-20	20W	1600LM	135MM, 70MM	115mm

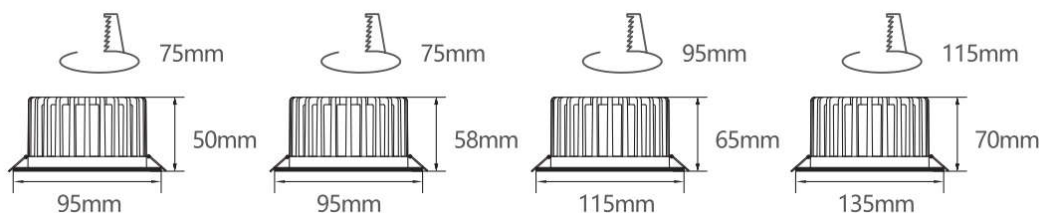

ZHONGSHAN LUMIDENSE TRADING CO LTD.

Room 2008, Yihualingfeng Building,
No.38 Yuelai south Road, Shiqi district,
Zhongshan city, china.
P.O.:528400

Phone: +86 760-88238830
Mobile: +86 131 2934 5064
Website: www.lumidense.com
Email: lumidense@lumidense.com

RDC04 IP40

LUMIDENSE

Professional Lighting Solutions Partner

RECESSED LED COB DOWNLIGHT

TECHNICAL SPECIFICATION

Housing: Die cast aluminum for body and the ring.

Protection: IP40.

Light Shade: Tempered Glass with frosted circle.

Rendering Index: CRI > 80



Available CCT: 3000K, 4000, 6500K.

Light Source: CREE, BRIDGELUX COB.

Lifetime: 30,000 Hrs 25C. 3Y warranty CB Comply.




PHOTOMETRIC DATA

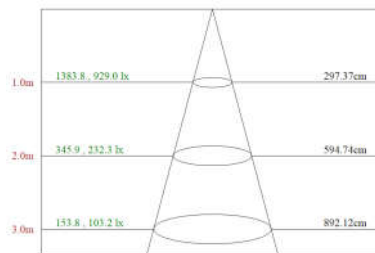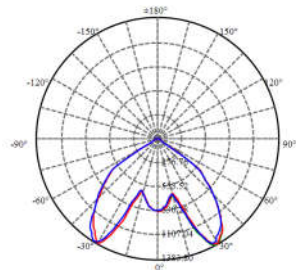

ORDERING INFORMATION

FAMILY SIZE	MAX WATTAGE	OUTPUT LUMEN	OUTER SIZE(D,H)	CUT OUT (C)
RDC04—2.5	10W	800LM	95MM, 50MM	75MM
RDC04—3	15W	1200LM	115MM, 60MM	95MM
RDC04—4	20W	1600LM	145MM, 75MM	115MM
RDC04—5	35W	2800LM	165MM, 90MM	145MM
RDC04—6	50W	4000LM	195MM, 100MM	165MM
RDC04—8	80W	6400LM	230MM, 120MM	195MM

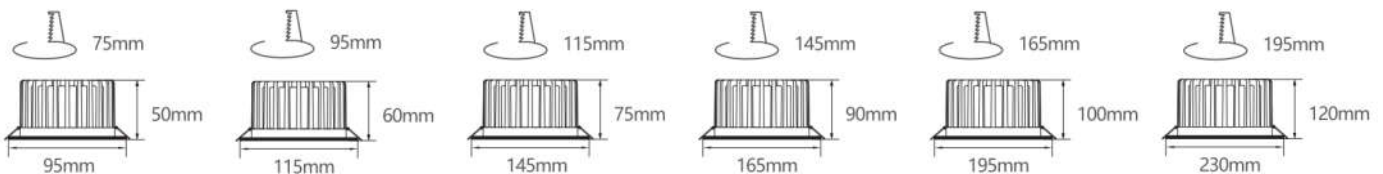

ZHONGSHAN LUMIDENSE TRADING CO LTD.

Room 2008, Yihualingfeng Building,
No.38 Yuelai south Road, Shiqi district,
Zhongshan city, china.
P.O.:528400

Phone: +86 760-88238830
Mobile: +86 131 2934 5064
Website: www.lumidense.com
Email: lumidense@lumidense.com

RRSP01

LUMIDENSE

Professional Lighting Solutions Partner

RECESSED LED SLIM PANEL LIGHT

TECHNICAL SPECIFICATION

Housing: Die cast aluminum trim, Presses steel back cover.

Protection: IP20.

Light Shade: Opal PS diffuser.

Rendering Index: CRI > 80



Available CCT: 3000K, 4000, 6500K.

Light Source: CREE, BRIDGELUX.

Lifetime: 30,000 Hrs 25C. 3Y warranty CB Comply.





PHOTOMETRIC DATA

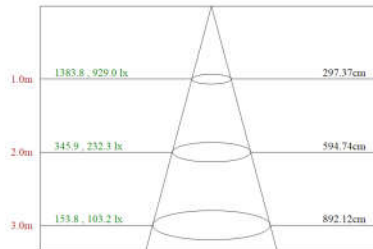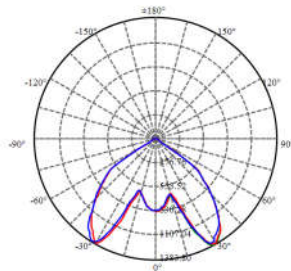

ORDERING INFORMATION

FAMILY SIZE	MAX WATTAGE	OUTPUT LUMEN	OUTER SIZE(A,H)	CUT OUT (C)
RRSP01-6	6W	360LM	120MM, 12MM	105MM
RRSP01-9	9W	700LM	150MM, 12MM	135MM
RRSP01-12	12W	900LM	170MM, 12MM	155MM
RRSP01-15	15W	1100LM	190MM, 12MM	175MM
RRSP01-18	18W	1400LM	225MM, 12MM	210MM
RRSP01-24	24W	1900LM	300MM, 12MM	285MM

Dimensiones



Surface Ring Design



ZHONGSHAN LUMIDENSE TRADING CO LTD.

Room 2008, Yihualingfeng Building,
No.38 Yuelai south Road, Shiqi district,
Zhongshan city, china.
P.O.:528400

Phone: +86 760-88238830
Mobile: +86 131 2934 5064
Website: www.lumidense.com
Email: lumidense@lumidense.com

RSSP01

RECESSED SQUARE LED SLIM PANEL LIGHT

TECHNICAL SPECIFICATION

Housing: Die cast aluminum trim, Presses steel back cover.

Protection: IP20.

Light Shade: Opal PS diffuser.

Rendering Index: CRI > 80

Available CCT: 3000K, 4000, 6500K.

Light Source: CREE, BRIDGELUX.



Lifetime: 30,000 Hrs 25C. 3Y warranty CB Comply.

LUMIDENSE

Professional Lighting Solutions Partner





PHOTOMETRIC DATA

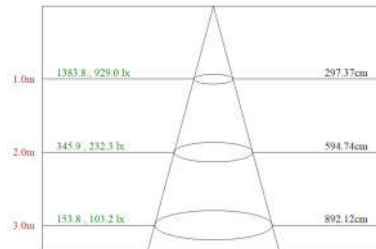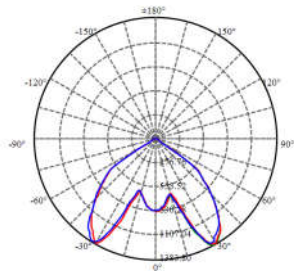

ORDERING INFORMATION

FAMILY SIZE	MAX WATTAGE	OUTPUT LUMEN	OUTER SIZE(A,H)	CUT OUT (C)
RSSP01-6	6W	360LM	120MM, 12MM	105MM
RSSP01-9	9W	700LM	150MM, 12MM	135MM
RSSP01-12	12W	900LM	170MM, 12MM	155MM
RSSP01-15	15W	1100LM	190MM, 12MM	175MM
RSSP01-18	18W	1400LM	225MM, 12MM	210MM
RSSP01-24	24W	1900LM	300MM, 12MM	285MM

Dimensions



Surface Ring Design



ZHONGSHAN LUMIDENSE TRADING CO LTD.

Room 2008, Yihualingfeng Building,
No.38 Yuelai south Road, Shiqi district,
Zhongshan city, china.
P.O.:528400

Phone: +86 760-88238830
Mobile: +86 131 2934 5064
Website: www.lumidense.com
Email: lumidense@lumidense.com

SML01

SURFACE MOUNTED LIGHT

TECHNICAL SPECIFICATION

Housing: Aluminum Housing.

Protection: IP20.

Light Shade: Opal PS diffuser.

Rendering Index: CRI > 80



Available CCT: 3000K, 4000, 6500K.

Light Source: SMD2835



Lifetime: 30,000 Hrs 25C. 3Y warranty CB Comply.



PHOTOMETRIC DATA

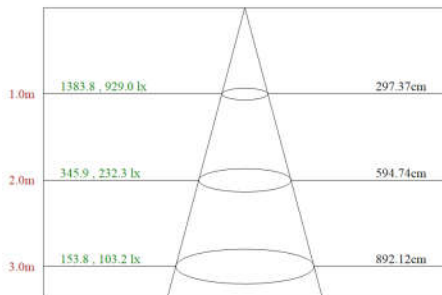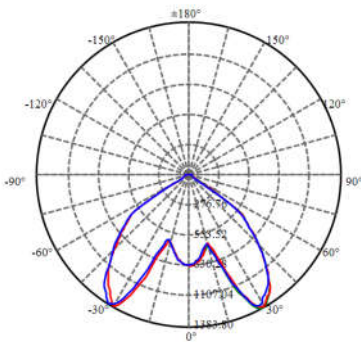

Dimensiones

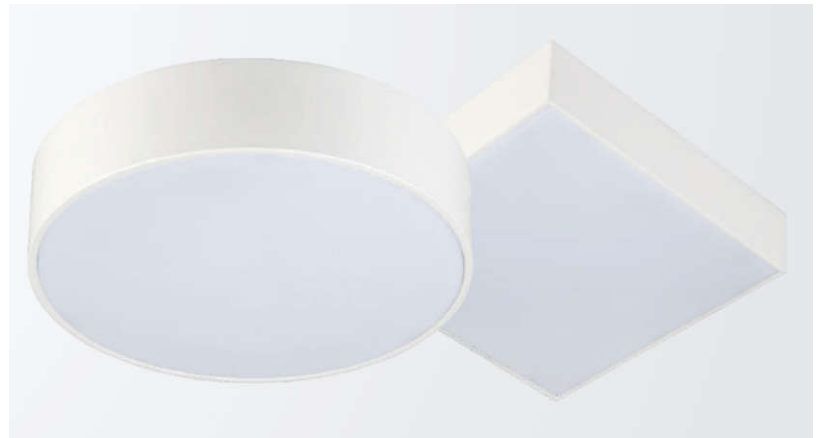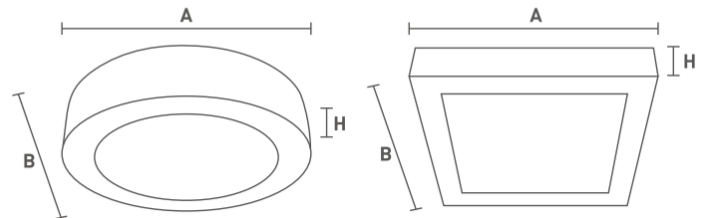

ORDERING INFORMATION

FAMILY SIZE	MAX WATTAGE	OUTPUT LUMEN	OUTER SIZE(A,B)	HEIGHT (H)
SML01-16	16W	1200LM	120MM, 40MM	40MM
SML01-24	24W	2000LM	170MM, 40MM	40MM
SML01-32	32W	2700LM	225MM, 40MM	40MM

ZHONGSHAN LUMIDENSE TRADING CO LTD.

Room 2008, Yihualingfeng Building,
No.38 Yuelai south Road, Shiqi district,
Zhongshan city, china.
P.O.:528400

Phone: +86 760-88238830
Mobile: +86 131 2934 5064
Website: www.lumidense.com
Email: lumidense@lumidense.com