

RSSP01

RECESSED SQUARE LED SLIM PANEL LIGHT

TECHNICAL SPECIFICATION

Housing: Die cast aluminum trim, Presses steel back cover.

Protection: IP20.

Light Shade: Opal PS diffuser.

Rendering Index: CRI > 80

Available CCT: 3000K, 4000, 6500K.

Light Source: CREE, BRIDGELUX.



Lifetime: 30,000 Hrs 25C. 3Y warranty CB Comply.

LUMIDENSE

Professional Lighting Solutions Partner





PHOTOMETRIC DATA

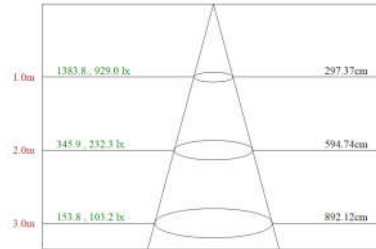

ORDERING INFORMATION

FAMILY SIZE	MAX WATTAGE	OUTPUT LUMEN	OUTER SIZE(A,H)	CUT OUT (C)
RSSP01-6	6W	360LM	120MM, 12MM	105MM
RSSP01-9	9W	700LM	150MM, 12MM	135MM
RSSP01-12	12W	900LM	170MM, 12MM	155MM
RSSP01-15	15W	1100LM	190MM, 12MM	175MM
RSSP01-18	18W	1400LM	225MM, 12MM	210MM
RSSP01-24	24W	1900LM	300MM, 12MM	285MM

Dimensions



Surface Ring Design



ZHONGSHAN LUMIDENSE TRADING CO LTD.

Room 2008, Yihualingfeng Building,
No.38 Yuelai south Road, Shiqi district,
Zhongshan city, china.
P.O.:528400

Phone: +86 760-88238830
Mobile: +86 131 2934 5064
Website: www.lumidense.com
Email: lumidense@lumidense.com