

RASP01

ADJUSTABLE RECESSED LED



LUMIDENSE

Professional Lighting Solutions Partner

TECHNICAL SPECIFICATION

Housing: Die cast aluminum for body and the ring.

Protection: IP20.

Light Shade: Tempered Glass with frosted circle.

Rendering Index: CRI > 80



Available CCT: 3000K, 4000, 6500K.

Light Source: CREE, BRIDGELUX COB.

Lifetime: 30,000 Hrs 25C. 5Y warranty, 100 LM/W.




PHOTOMETRIC DATA

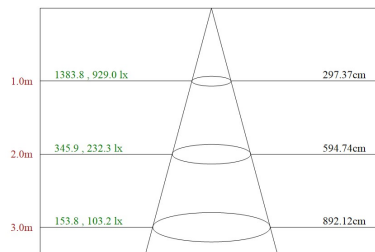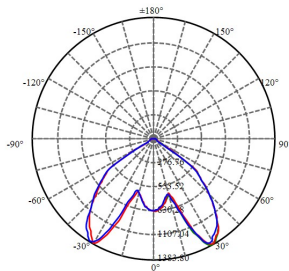

ORDERING INFORMATION

FAMILY SIZE	MAX WATTAGE	OUTPUT LUMEN	OUTER SIZE (D, H)	CUT OUT(C)
RASP01-7	7W	700LM	95MM, 50MM	75MM
RASP01-12	12W	1200LM	95MM, 58MM	75MM
RASP01-18	18W	1800LM	115MM, 65MM	95MM
RASP01-20	20W	2000LM	135MM, 70MM	115mm

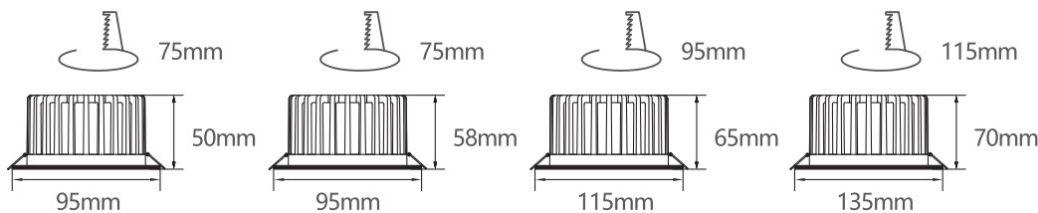

ZHONGSHAN LUMIDENSE TRADING CO LTD.

Room 2008, Yihualingfeng Building,
No.38 Yue'ai south Road, Shiqi district,
Zhongshan city, china.
P.O.:528400

Phone: +86 760-88238830
Mobile: +86 136 3111 7825
Website: www.lumidense.com
Email: lumidense@lumidense.com