

# RDC01

RECESSED LED COB DOWNLIGHT



# LUMIDENSE

Professional Lighting Solutions Partner

## TECHNICAL SPECIFICATION

**Housing:** Die cast aluminum for body and the ring.

**Protection:** IP20.

**Light Shade:** Tempered Glass with frosted circle.

**Rendering Index:** CRI > 80



**Available CCT:** 3000K, 4000, 6500K.

**Light Source:** CREE, BRIDGELUX.

**Lifetime:** 30,000 Hrs 25C. 5Y warranty, 100 LM/W.




## PHOTOMETRIC DATA

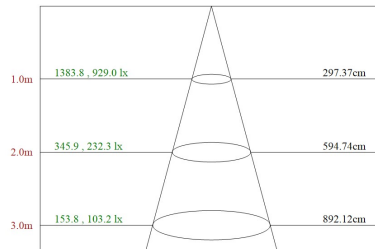

## ORDERING INFORMATION

FAMILY SIZE	MAX WATTAGE	OUTPUT LUMEN	OUTER SIZE	CUT OUT
RDC01—2.5	7W	700LM	95MM	75MM
RDC01—3	9W	900LM	115MM	95MM
RDC01—4	12W	1200LM	135MM	110MM
RDC01—5	15W	1500LM	165MM	140MM
RDC01—6	20W	2000LM	195MM	160MM
RDC01—8	30W	3000LM	225MM	200MM

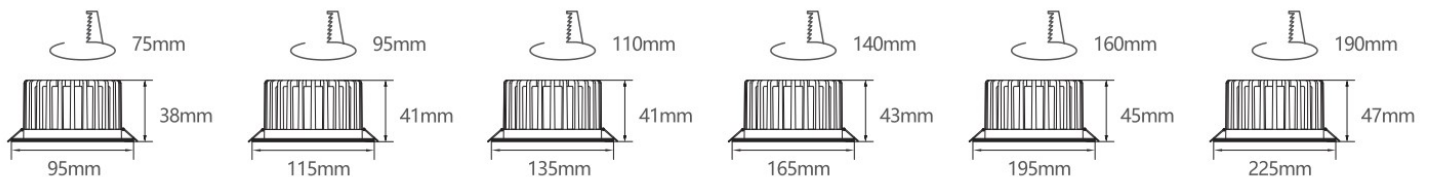

## ZHONGSHAN LUMIDENSE TRADING CO LTD.

Room 2008, Yihualingfeng Building, No.38 Yuelai south Road, Shiqi district, Zhongshan city, china.  
P.O.:528400,  
Lumidense@lumidense.com

**Foreign Sales Department:**  
Phone: +86 136 3111 7825  
Website: www.lumidense.com  
Email: paul.lan@lumidense.com