

RDC03

RECESSED LED COB DOWNLIGHT



LUMIDENSE

Professional Lighting Solutions Partner

TECHNICAL SPECIFICATION

Housing: Die cast aluminum for body and the ring.

Protection: IP20.

Light Shade: Tempered Glass with frosted circle.

Rendering Index: CRI > 80



Available CCT: 3000K, 4000, 6500K.

Light Source: CREE, BRIDGELUX.

Lifetime: 30,000 Hrs 25C. 5Y warranty, 100 LM/W.




PHOTOMETRIC DATA

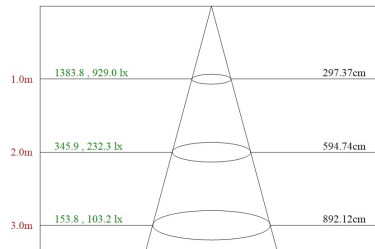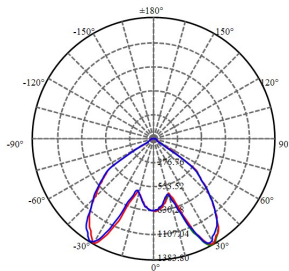

ORDERING INFORMATION

| FAMILY SIZE | MAX WATTAGE | OUTPUT LUMEN | OUTER SIZE | CUT OUT |
|-------------|-------------|---------------|------------|---------|
| RDC03—2.5 | 7W | 700LM | 90MM | 75MM |
| RDC03—3 | 9W | 900LM | 115MM | 95MM |
| RDC03—4 | 10W/12W | 1000LM/1200LM | 135MM | 115MM |
| RDC03—5 | 15W/18W | 1500LM/1800LM | 165MM | 145MM |
| RDC03—6 | 20W/24W | 2000LM/2400LM | 190MM | 165MM |
| RDC03—8 | 30W/35W | 3000LM/3500LM | 220MM | 195MM |

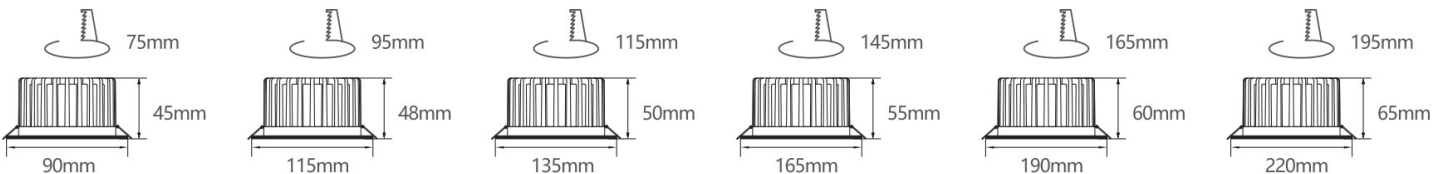

ZHONGSHAN LUMIDENSE TRADING CO LTD.

Room 2008, Yihualingfeng Building, No.38 Yuelai south Road, Shiqi district, Zhongshan city, china.
P.O.:528400,
Lumidense@lumidense.com

Foreign Sales Department:
Phone: +86 136 3111 7825
Website: www.lumidense.com
Email: paul.lan@lumidense.com