

# RDC04 IP40

RECESSED LED COB DOWNLIGHT



# LUMIDENSE

Professional Lighting Solutions Partner

## TECHNICAL SPECIFICATION

**Housing:** Die cast aluminum for body and the ring.

**Protection:** IP40.

**Light Shade:** Tempered Glass with frosted circle.

**Rendering Index:** CRI > 80



**Available CCT:** 3000K, 4000, 6500K.

**Light Source:** CREE, BRIDGELUX COB.

**Lifetime:** 30,000 Hrs 25C. 5Y warranty, 100 LM/W.




## PHOTOMETRIC DATA

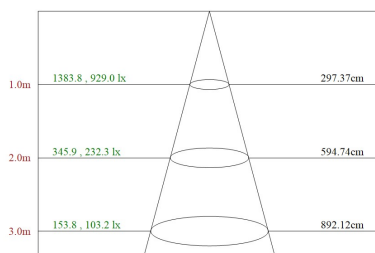

## ORDERING INFORMATION

FAMILY SIZE	MAX WATTAGE	OUTPUT LUMEN	OUTER SIZE(D,H)	CUT OUT (C)
RDC04—2.5	10W	1000LM	95MM, 50MM	75MM
RDC04—3	15W	1500LM	115MM, 60MM	95MM
RDC04—4	20W	2000LM	145MM, 75MM	115MM
RDC04—5	35W	3500LM	165MM, 90MM	145MM
RDC04—6	50W	5000LM	195MM, 100MM	165MM
RDC04—8	80W	8000LM	230MM, 120MM	195MM

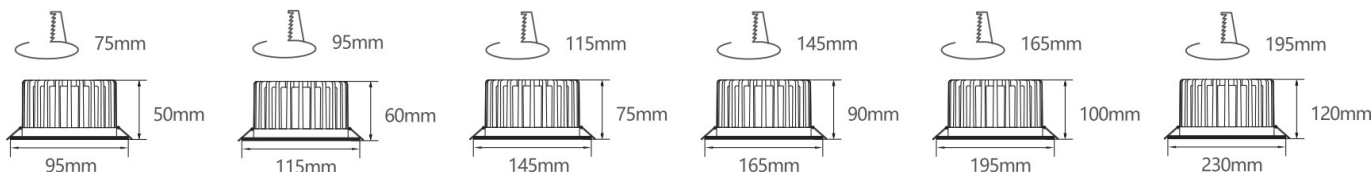

## ZHONGSHAN LUMIDENSE TRADING CO LTD.

Room 2008, Yihualingfeng Building, No.38 Yuelai south Road, Shiqi district, Zhongshan city, china.  
P.O.:528400,  
Lumidense@lumidense.com

**Foreign Sales Department:**  
Phone: +86 136 3111 7825  
Website: www.lumidense.com  
Email: paul.lan@lumidense.com