

RDC05 IP40

RECESSED LED COB DOWNLIGHT



LUMIDENSE

Professional Lighting Solutions Partner

TECHNICAL SPECIFICATION

Housing: Die cast aluminum for body and the ring.

Protection: IP40.

Light Shade: Tempered Glass with frosted circle.

Rendering Index: CRI > 80

Available CCT: 3000K, 4000, 6500K.



Light Source: CREE, BRIDGELUX COB.

Lifetime: 50,000 Hrs 25C. 5Y warranty, 100 LM/W.

COB size : 28x28mm LES24




PHOTOMETRIC DATA

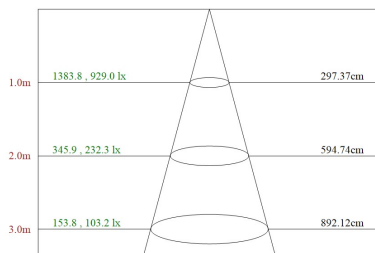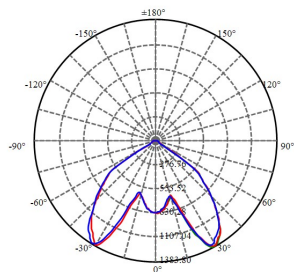

ORDERING INFORMATION

FAMILY SIZE	MAX WATTAGE	OUTPUT LUMEN	OUTER SIZE(D,H)	CUT OUT (C)
RDC05 - 8	50W	5000LM	230MM, 120MM	195MM

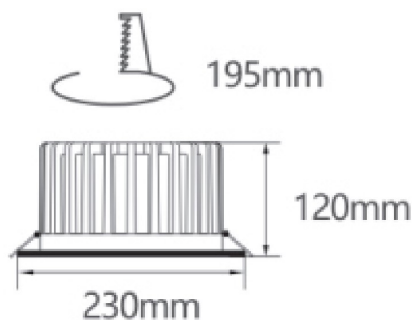

ZHONGSHAN LUMIDENSE TRADING CO LTD.

Room 2008, Yihualingfeng Building, No.38 Yuelai south Road, Shiqi district, Zhongshan city, china.
P.O.:528400,
Lumidense@lumidense.com

Foreign Sales Department:
Phone: +86 136 3111 7825
Website: www.lumidense.com
Email: paul.lan@lumidense.com