

RDC06 IP40

RECESSED LED COB DOWNLIGHT



LUMIDENSE

Professional Lighting Solutions Partner

TECHNICAL SPECIFICATION

Housing: Die cast aluminum for body and the ring.

Protection: IP40.

Light Shade: PC lens 15° or 24°

Rendering Index: CRI > 80

Available CCT: 3000K, 4000, 6500K.




Light Source: CREE, BRIDGELUX COB.

Lifetime: 50,000 Hrs 25C. 5Y warranty, 90 LM/W.

COB size : 19x19mm LES17 and 13.5x13.5mm LES11




PHOTOMETRIC DATA

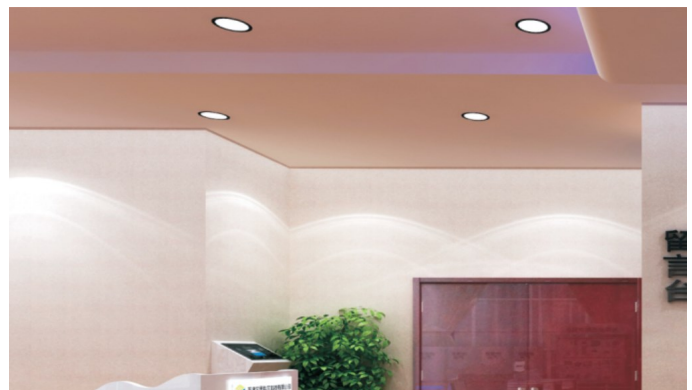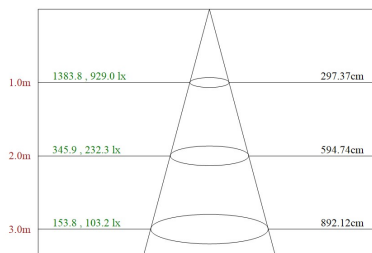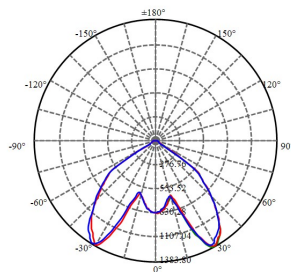

ORDERING INFORMATION



FAMILY SIZE	MAX WATTAGE	OUTPUT LUMEN	OUTER SIZE(D,H)	CUT OUT (C)
RDC06 - 2	5W	450LM	75MM, 40MM	55MM
RDC06 - 2.5	7W	630LM	95MM, 45MM	75MM
RDC06 - 3	12W	1080LM	115MM, 60MM	95MM
RDC06 - 4	15W	1350LM	135MM, 70MM	115MM
RDC06 - 5	20W	1800LM	170MM, 80MM	145MM

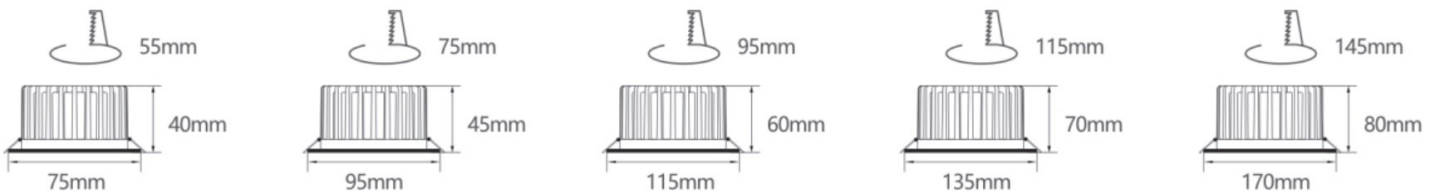

ZHONGSHAN LUMIDENSE TRADING CO LTD.

Room 2008, Yihualingfeng Building, No.38 Yuelai south Road, Shiqi district, Zhongshan city, china.
P.O.:528400,
Lumidense@lumidense.com

Foreign Sales Department:
Phone: +86 136 3111 7825
Website: www.lumidense.com
Email: paul.lan@lumidense.com