


RDC07 IP65

RECESSED LED COB DOWNLIGHT



LUMIDENSE

Professional Lighting Solutions Partner

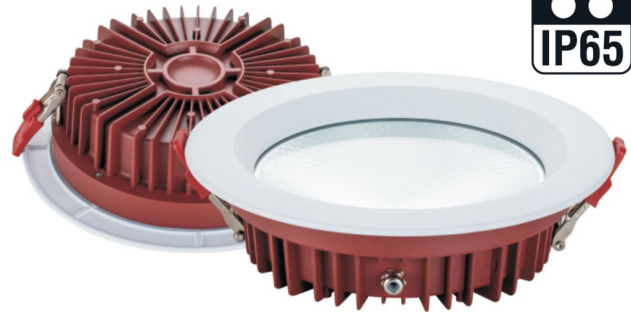

TECHNICAL SPECIFICATION

Housing: Die cast aluminum for body and the ring.

Protection: IP40.

Light Shade: Tempered Glass Diffuser with rubber gasket.

Rendering Index: CRI > 80

Available CCT: 3000K, 4000, 6500K.



Light Source: CREE, BRIDGELUX COB.

Lifetime: 50,000 Hrs 25C. 5Y warranty, 100 LM/W.

COB size : 28x28mm LES24 and 19x19mm LES17




PHOTOMETRIC DATA

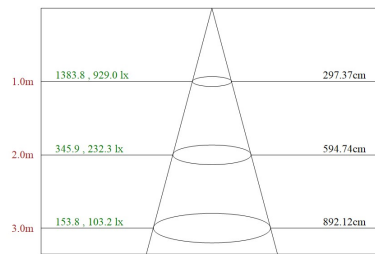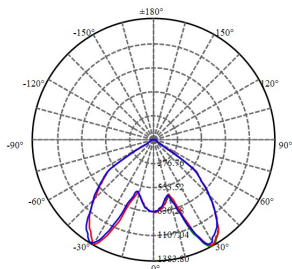

ORDERING INFORMATION

FAMILY SIZE	MAX WATTAGE	OUTPUT LUMEN	OUTER SIZE(D,H)	CUT OUT (C)
RDC07 - 2.5	7W	700LM	95MM, 30MM	75MM
RDC07 - 3	12W	1200LM	115MM, 35MM	95MM
RDC06 - 4	18W	1800LM	140MM, 40MM	115MM
RDC07 - 5	25W	2500LM	165MM, 45MM	145MM
RDC07 - 6	30W	3000LM	195MM, 50MM	165MM
RDC07 - 8	40W	4000LM	230MM, 60MM	195MM

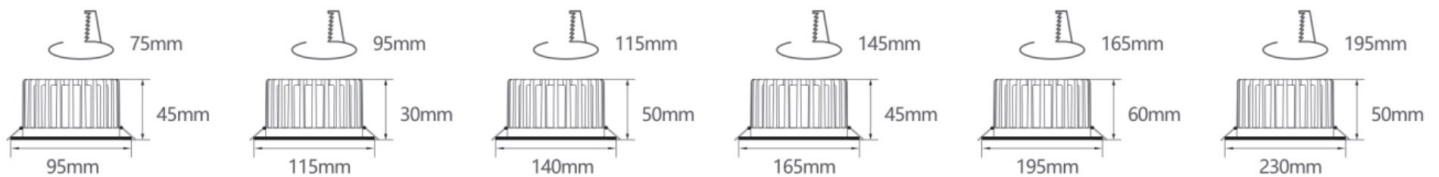

ZHONGSHAN LUMIDENSE TRADING CO LTD.

Room 2008, Yihualingfeng Building, No.38 Yuelai south Road, Shiqi district, Zhongshan city, china.
P.O.:528400,
Lumidense@lumidense.com

Foreign Sales Department:
Phone: +86 136 3111 7825
Website: www.lumidense.com
Email: paul.lan@lumidense.com