

# RDC08S IP65

RECESSED LED COB DOWNLIGHT



# LUMIDENSE

Professional Lighting Solutions Partner

## TECHNICAL SPECIFICATION

**Housing:** Die cast aluminum for body and the ring.

**Protection:** IP65.

**Light Shade:** Tempered Protection Glass


**Rendering Index:** CRI > 80

**Available CCT:** 3000K, 4000, 6500K.



**Light Source:** CREE, BRIDGELUX COB.

**Lifetime:** 50,000 Hrs 25C. 5Y warranty, 100LM/W.

**COB size :** 24x24mm LES19 and 19x19mm LES17

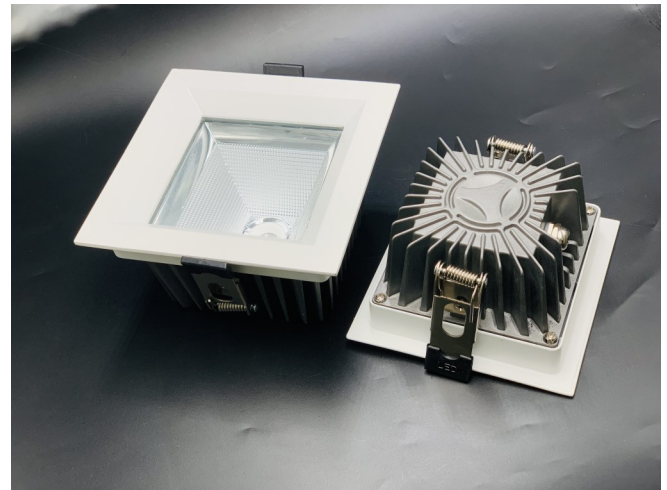

## PHOTOMETRIC DATA

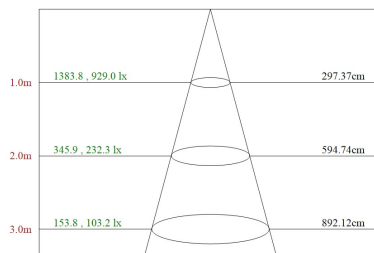

## ORDERING INFORMATION

FAMILY SIZE	MAX WATTAGE	OUTPUT LUMEN	OUTER SIZE(D,H)	CUT OUT (C)
RDC08S - 4	15W	1500LM	110X110MM, 59MM	90MM
RDC08S - 5	20W	2000LM	127X127MM, 70MM	110MM
RDC08S - 6	30W	3000LM	165X165MM, 80MM	145MM
RDC08S - 8	40/50W	4000LM / 5000LM	220X220MM, 90MM	200MM

## ZHONGSHAN LUMIDENSE TRADING CO LTD.

Room 2008, Yihualingfeng Building, No.38 Yuelai south Road, Shiqi district, Zhongshan city, china.  
P.O.:528400,  
[Lumidense@lumidense.com](mailto:Lumidense@lumidense.com)

### Foreign Sales Department:

Phone: +86 136 3111 7825  
Website: [www.lumidense.com](http://www.lumidense.com)  
Email: [paul.lan@lumidense.com](mailto:paul.lan@lumidense.com)

